



## **SLIDING AXLE** **Kalyn Siebert Sliding Axle trailers are the right choice for towing**

low-clearance construction equipment, containers, agricultural equipment, or just about anything you can imagine. A low 7-degree approach angle and 20K neck-mounted winch make dragging damaged or disabled equipment onto the deck routine. Options, like dock levelers, 10-function remote controls, 20HP power pack, bulkheads and work lights allow these sliders to be as versatile as you need them to be.

### **High Performance Product**

All Kalyn Siebert trailers are engineered to exceed the toughest standards in the industry, delivering:

- Maximum strength at low tare weights
- Lowest maintenance costs
- Longest service life
- The highest possible return on investment

You can rest assured that our trailers protect your payload and your investment.

**That's the Kalyn Siebert Advantage.**

### **High Performance Design**


- Capacity 70,000 lbs – 110,000 lbs distributed, 50,000 lbs – 70,000 lbs concentrated in 10'
- Four-beam design with 100,000 PSI yield flanges, 80,000 PSI yield webs
- 9" center-to-center cross member spacing
- 20,000 lb planetary winch
- Shot blasted, epoxy primer, polyurethane paint
- Sealed electrical system with rubber mounted LED lights

**ENGINEERED TO PERFORM. BUILT TO LAST.**

1505 West Main Street, Gatesville, TX 76528 | 800.525.9589 | [www.kalynsiebert.com](http://www.kalynsiebert.com)

**KALYN  
SIEBERT®**  
A HEIL TRAILER COMPANY

# SLIDING AXLE

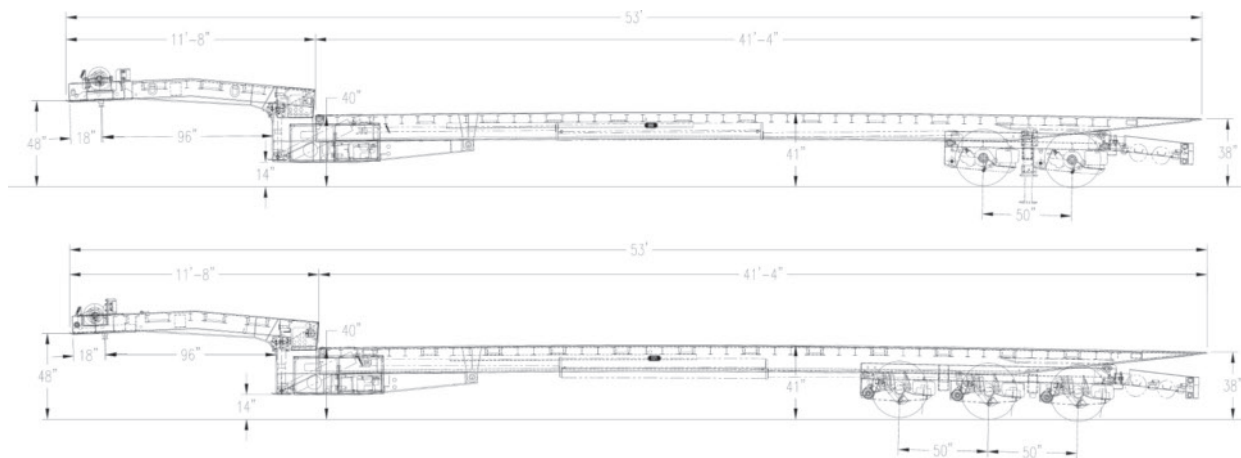

## Standard Specs

### GOOSENECK

- Neck length 10' 8" – 11' 8"
- Neck height loaded 57½" at front
- 84"– 96" swing clearance
- 2" pin, 18" setting, 48" fifth wheel height
- Set up for wet-line operation, 15 GPM at 2,800 PSI
- Controls located in roadside cabinet, storage curbside cabinet
- 20,000 lb planetary winch at front center, two-function wireless remote, 100' of 5/8" wire rope with shackle, tensioner, roller guide
- Two-speed landing legs

### MAIN DECK

- Deck length 37' 4" – 41' 4"
- Deck height loaded 38" at rear
- 70,000 lbs – 110,000 lbs distributed
- 50,000 lbs - 70,000 lbs concentrated in 10'
- Four-beam design
- 100,000 PSI yield flanges
- 80,000 PSI yield web

- 4" junior I-beams on 9" centers
- Tie down slots outer beam (approximately 36" centers)
- Tie down slots center plate (approximately 36" centers)
- Reinforced approach plate
- 1½" Apatong floor
- Recessed winch roller at front center
- Two 6" lift cylinders
- Two-stage piggyback slide cylinders (slide time is approximately 30 seconds)
- Load angle 7°, dump angle 16°
- Self-centering undercarriage
- Greasable rollers
- Air, electrical and hydraulic lines enclosed in flex track for protected travel

### SUSPENSION

- Ridewell Air Ride
- 50" spreads
- Automatic air control system
- Manual dump valve

### AXLES

- 25,000 lb nominal capacity
- Tapered spindles
- Hub piloted 8-stud mount
- Outboard cast drum
- Automatic slack adjusters
- 12¼" x 7½" (QC)
- Parking brakes on all axles
- ABS: 2S/1M (2 axle)
- ABS: 4S/2M (3 axle)

### WHEELS / TIRES

- Steel disc wheels, 6.75" x 17.5"
- 235/75R17.5, 16PR (low profile) radial tires

### ELECTRICAL SYSTEM

- D.O.T. approved 12 volt, 7-way
- LED-sealed beam lights and harness
- Marker lights/mid-turn signals
- Third tail as strobe light

## Options\*

- CORSOL corrosion control
- 20 HP power package
- Dual hydraulic system
- Multi-function wireless remote
- Hydraulic dock levelers
- Winch capacity
- Storage compartments
- Bulkhead (alum/steel)
- Work lights

- Aluminum wheels
- Air weigh scale
- Tire inflation system
- Central lube system
- Stake pockets/rub-rail
- D-rings/ratchet winches
- Swing removable outriggers
- Steel floor
- Front extension ramps

\* Additional options available

## Warranty

- 5 year prorated frame
- 3 year prorated paint
- 1 year on remainder of trailer